Version: A

2015-04-22

Specification for Approval

Customer:	
Model Name:	

Sı	Customer approval		
R&D Designed	R&D Approved	QC Approved	
Peter	Peng Jun		

Version: A

2015-04-22

Revision Record

REV NO.	REV DATE	CONTENTS	Note
Α	2015-04-22	NEW ISSUE	

Version: A

2015-04-22

Table of Contents

List	Description	Page No.
	Cover	1
	Revision Record	2
	Table of Contents	3
1	General Information	4
2	External Dimensions	5
3	Interface Description	6
4	Absolute Maximum Ratings	6
5	DC Characteristics	7
6	Timing Characteristics	7
7	Backlight Characteristics	9
8	Optical Characteristics	10
9	Reliability Test Conditions And Methods	12
10	Handling Precautions	13
11	Precaution For Use	14
12	Packing Method	14



Version: A

2015-04-22

1. eneral Information


ITEM	STANDARD VALUES	UNITS
LCD type	4.3"TFT	
Dot arrangement	480(RGB)×272	dots
Color filter array	RGB vertical stripe	
Display mode	TN / Transmission / Normally White	
Viewing Direction	6 o'clock	
Driver IC	HX8257A	
Module size	105.5(W)×67.2(H)×3.0(T)	mm
Active area	95.04(W)×53.856(H)	mm
Dot pitch	0.198 (W)×0.198 (H)	mm
Interface	24-bit Parallel RGB Interface	
Operating temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C
Back Light	10 White LED	
Weight	TBD	g



Version: A

2015-04-22

2. External Dimensions

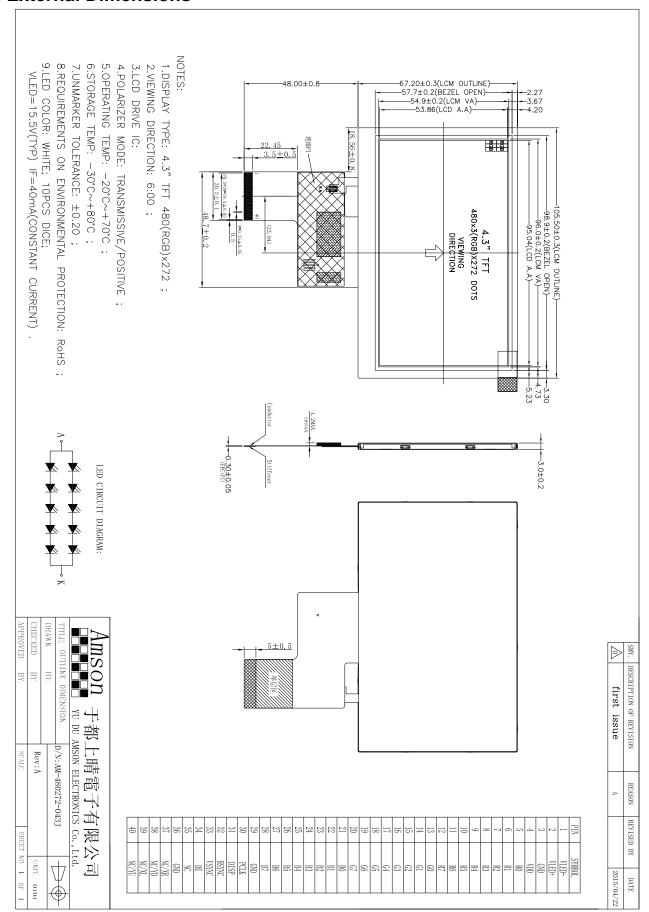



Version: A

2015-04-22

3. Interface Description

Pin	Symbol	Description.
1	VLED-	LED backlight (Cathode).
2	VLED+	LED backlight (Anode).
3	GND	Ground.
4	VDD	Power supply.
5~12	R0~R7	Red Data.
13~20	G0~G7	Green Data.
21~28	B0~B7	Blue Data.
29	GND	Ground.
30	PCLK	Dot clock signal input. Latching input data at its rising edge.
31	DISP	Display on/off.
32	HSYNC	Horizontal sync input. Negative polarity.
33	VSYNC	Vertical sync input. Negative polarity.
34	DE	Data enable input. Active high to enable the input data bus.
35	NC	NC.
36	GND	Ground.
37	NC/XR	No connection /TP Right.
38	NC/YD	No connection /TP Bottom.
39	NC/XL	No connection /TP Left.
40	NC/YU	No connection /TP Up.

4. Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit
Analog Supply Voltage	VDD	-0.3	5	V
Input Voltage	Vin	-0.3	VDD+0.3	V
Operating Temperature	Тор	-20	70	°C
Storage Temperature	Тѕт	-30	80	°C
Storage Humidity	HD	20	90	%RH

Version: A


2015-04-22

5. DC Characteristics

Item	Symbol	Min.	Тур.	Max.	Unit	Remark
Analog Supply Voltage	VDD	3.0	3.3	3.6	V	-
Input High Voltage	V _{IH}	0.7VDD	-	VDD	٧	Digital input pins
Input Low Voltage	V _{IL}	GND	-	0.3VDD	٧	Digital input pins
Output High Voltage	V _{OH}	VDD-0.4	1	VDD	V	Digital output pins
Output Low Voltage	V_{OL}	GND	-	VDD+0.4	V	Digital output pins
I/O Leak Current	lu	-1	-	1	uA	-

6. Timing Characteristics6.1 Power ON/OFF Sequence


Power ON Sequence

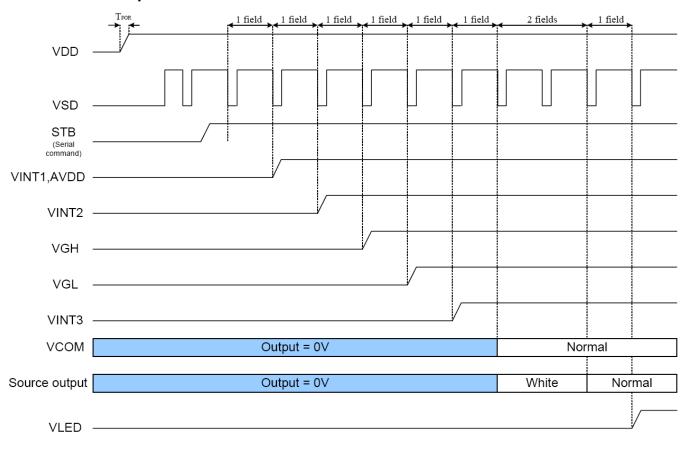

Version: A


2015-04-22

Power OFF Sequence

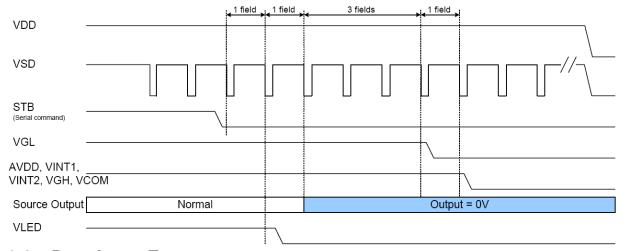


6.2 Data Input Format

6.2.1 Vertical input timing

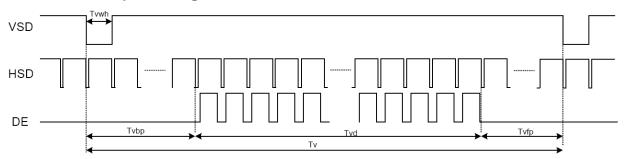

6.2.2 Parallel RGB Mode Data format

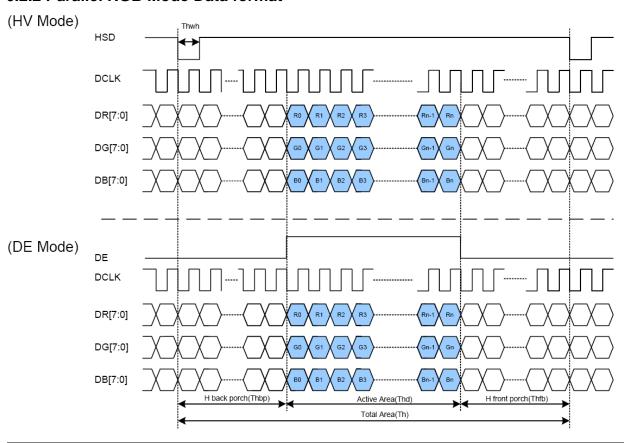

Version: A


2015-04-22

6.2.3 Parallel RGB input timing table

_	0				
Parameter	Symbol	Min.	Тур.	Max.	Unit
DCLK frequency	fclk	5	9	12	MHz
VSD period time	Τv	277	288	400	Н
VSD display area	Tvd		Н		
VSD back porch	Tvb	3	8	31	Н
VSD front porch	Tvfp	2	8	93	Н
HSD period time	Th	520	525	800	DCLK
HSD display area	Thd	480			DCLK
HSD back porch	Thbp	36	40	255	DCLK
HSD front porch	Thfp	4	5	65	DCLK

7. Backlight Characteristics

LED CIRCUIT DIAGRAM:



Item	Symbol	MIN	TYP	MAX	UNIT	Test Condition
Supply Voltage	Vf	14.5	15.5	16.5	V	If=40mA
Supply Current	lf	-	-	40	mA	-
Luminous Intensity for LCM	-	380	450	-	Cd/m ²	If=40mA
Uniformity for LCM	-	80	-	-	%	If=40mA
Life Time	-	20000	-	-	Hr	If=40mA
Backlight Color	White					



Version: A


2015-04-22

8. Optical Characteristics

Item		Symbol	Condition	Min.	Тур.	Max.	Unit	Remark
Contrast R	atio	CR		480	600			Note3
Doggongo -	Timo	Tr	25°C	1	3	6	mo	Note4
Response	Tille	Tf	25°C		7	14	ms	NOIE4
	3H	θ3H(R)		65	75		1	
Viewing	9H	θ9H(L)	CR≥10	65	75		-	Note5
Angle	6H	φ6H(D)	CR210	60	70			Notes
	12H	φ12(U)		50	60			
	White	Х	0-a-0°		TBD		1	
	vviile	У	θ=φ=0°		TBD			
	Red	Х	0-a-0°		TBD			
Color Filter	Reu	у	θ=φ=0°		TBD		1	Note6
Chromaticity	Croon	Х	0-a-0°		TBD			Noteo
	Green	у	θ=φ=0°		TBD			
	Blue	Х	θ=φ=0°		TBD			
	Dide	у	σ-ψ-υ		TBD			

Note1.Ambient condition: 25°C±2°C, 60±10%RH, under 10 Lux in the darkroom.

Note2.Measure device: BM-5A (TOPCON), viewing cone=1°, IL=40mA.

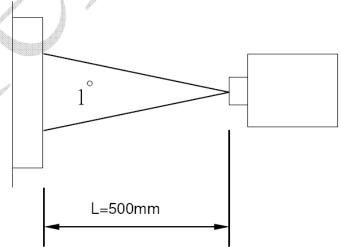


Note3. Definition of Contrast Ratio:

CR = White Luminance (ON) / Black Luminance (OFF)


Version: A

2015-04-22

Note4. Definition of response time: The response time is defined as the time interval between the 10% and 90% amplitudes.

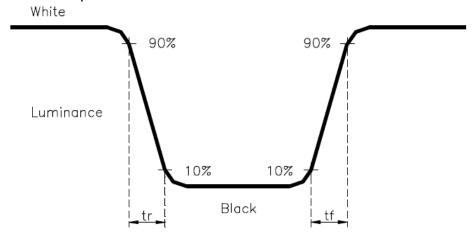

Note5. Definition of view angle(θ , ϕ):

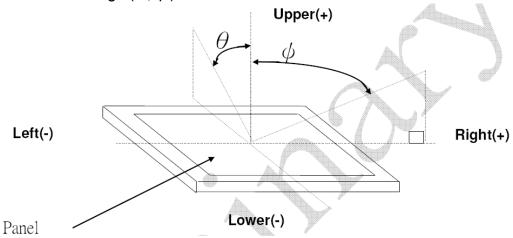

Note6. Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD



Version: A

2015-04-22

9. Reliability Test Conditions and Methods

NO.	TEST ITEMS	TEST CONDITION	INSPECTION AFTER TEST
	High Temperature Storage	80°C±2°C×200Hours	
	Low Temperature Storage	-30°C±2°C×200Hours	
	High Temperature Operating	70°C±2°C×120Hours	Inspection after 2~4hours storage at room temperature,
	Low Temperature Operating	-20°C±2°C×120Hours	the samples should be free from defects: 1, Air bubble in the
	Temperature Cycle(Storage)	$ \begin{array}{c} -20^{\circ}\text{C} & \longrightarrow & 25^{\circ}\text{C} & \longrightarrow & 70^{\circ}\text{C} \\ (30\text{min}) & & & & & & & \\ \hline & & & & & & & \\ & & & & & & & \\ \hline & & & & & & & \\ & & & & & & & \\ \hline & & & & & & & \\ & & & & & & & \\ \hline & & & & & & & \\ & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & \\ \hline & & & & \\$	LCD. 2, Seal leak. 3, Non-display. 4, Missing segments. 5, Glass crack.
	Damp Proof Test (Storage)	50°C±5°C×90%RH×120Hours	6, Current IDD is twice higher than initial value.
	Vibration Test	Frequency:10Hz~55Hz~10Hz Amplitude:1.5M X,Y,Z direction for total 3hours (Packing Condition)	7, The surface shall be free from damage. 8, The electric characteristic requirements shall be
	Drooping Test	Drop to the ground from 1M height one time every side of carton. (Packing Condition)	satisfied.
	ESD Test	Voltage:±8KV,R:330Ω,C:150PF,Air Mode,10times	

REMARK:

- 1, The Test samples should be applied to only one test item.
- 2, Sample side for each test item is 5~10pcs.
- 3, For Damp Proof Test, Pure water(Resistance $> 10M\Omega$) should be used.
- 4,In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judge as a good part.
- 5, EL evaluation should be accepted from reliability test with humidity and temperature: Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and Fluorescence EL has.
- 6, Failure Judgment Criterion: Basic Specification Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.



Version: A

2015-04-22

10. Handling Precautions

10.1 Mounting method

The LCD panel of AMSON TFT module consists of two thin glass plates with polarizes which easily be damaged. And since the module in so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

10.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent

[Recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (CI), Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happen by miss-handling or using some materials such as Chlorine (CI), Sulfur (S) from customer, Responsibility is on customer.

10.3 Caution against static charge

The LCD module use C-MOS LSI drivers, so we recommended that you:

Connect any unused input terminal to IOVCC or GND, do not input any signals before power is turned on, and ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

10.4 packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

10.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD's how dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- Slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.
 - Usage under the maximum operating temperature, 50%Rh or less is required.



Version: A

2015-04-22

10.6 storing

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
 [It is recommended to store them as they have been contained in the inner container at the time of delivery from us

10.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

11. Precaution for Use

11.1

A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

11.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification
- When a new problem is arisen which is not specified in this specifications
- When an inspection specifications change or operating condition change in customer is reported to AMSON TFT, and some problem is arisen in this specification due to the change
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

12. Packing Method

TBD